



Switching Available p. 75




Mounting Solution Available p. 5

Medium Profile Strobe Beacon

Durable Polycarbonate Construction

- User selectable flash patterns; double (126 fpm), single (75 fpm) or quad (192 fpm)
- 10-22 Joules (depending on flash pattern chosen)
- Fully encapsulated circuitry
- Shipping weight: 2.7 lbs
- 1/2" NPT conduit mount/permanent mount flange mount or bear claw saddle mount versions
- Magnetic mount models supplied with 80 lb pull magnet and switched/fused cigarette lighter plug assembly
- Permanent mount versions supplied with 1/2" NPT feature and surface mount hardware
- Flange conversion kit #27200
- O-ring seal
- Lens colours include amber, blue, clear, green and red

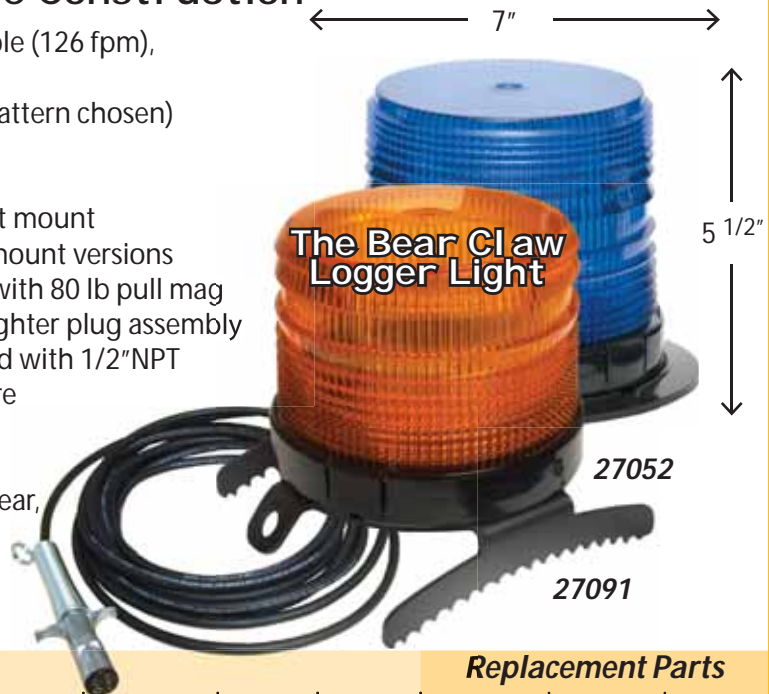

Note: Dimming feature indicates photocell with automatic night time operation

27000 Series

Replacement Parts

Model #	Lens Colour	Volts DC	Max Amps	Mounting	Dimming	Flash	Height	Lens	Circuit	Strobe Tube
27001	Amber	12-48	2.5	PM	No	DSQ	5 3/4"	300-S-A	27100	129
27002	Blue	12-48	2.5	PM	No	DSQ	5 3/4"	300-S-B	27100	129
27021	Amber	12-48	2.5	MM	No	Single	5 5/8"	300-S-A	27100	129
27022	Blue	12-48	2.5	MM	No	Single	5 5/8"	300-S-B	27100	129
27041	Amber	12-48	2.5	MM	No	Quad	5 5/8"	300-S-A	27100	129
27042	Blue	12-48	2.5	MM	No	Quad	5 5/8"	300-S-B	27100	129
27051	Amber	12-48	2.5	FL	No	DSQ	5 1/2"	300-S-A	27100	129
27052	Blue	12-48	2.5	FL	No	DSQ	5 1/2"	300-S-B	27100	129
27057	Amber	12-48	2.5	FL	Yes	DSQ	5 1/2"	300-S-A	27100	129
27058	Blue	12-48	2.5	FL	Yes	DSQ	5 1/2"	300-S-B	27100	129
27061	Amber	12-48	2.5	MB	No	DSQ	5 3/4"	300-S-A	27100	129
27062	Blue	12-48	2.5	MB	No	DSQ	5 3/4"	300-S-B	27100	129
27011	Amber	72-125	0.5	PM	No	DSQ	5 3/4"	300-S-A	27101	129
27012	Blue	72-125	0.5	PM	No	DSQ	5 3/4"	300-S-B	27101	129
27013	Clear	72-125	0.5	PM	No	DSQ	5 3/4"	300-S-C	27101	129

Bear Claw Model

Model #	Lens Colour	Volts DC	Max Amps	Mounting	Dimming	Flash	Height	Lens	Circuit	Strobe Tube
27091	Amber	12-48	0.5	BC	No	Double	6 7/8"	300s-A	27100	129
27102	Replacement saddle for bear claw logger light									

Legend: PM = Permanent Mount, MM = Magnetic Mount, MB = Mirror Bracket Mount, FL = Flange Mount
DSQ = User selectable flash patterns: double 126 fpm, single (75 fpm) or quad (192 fpm),
BC = Bear Claw Mount

Medium Profile Strobe Beacons



Proudly Canadian



Switching Available
p. 75



Mounting Solution Available
p. 5

Medium Profile Strobe Beacons

Medium Profile Strobe Beacon Durable Polycarbonate Construction

- User selectable flash patterns; double (126 fpm), single (75 fpm) or quad (192 fpm)
- 10-22 Joules (depending on flash pattern chosen)
- Fully encapsulated circuitry
- Shipping weight: 2.7 lbs
- 1/2" NPT conduit mount/permanent mount or flange mount versions
- Magnetic mount models supplied with 80 lb pull magnet and switched/fused cigarette lighter plug assembly
- Permanent mount versions supplied with 1/2" NPT feature and surface mount hardware
- Flange conversion kit #27200
- O-ring seal
- Lens colours include amber, blue, clear, green and red

27006



27000 Series							Replacement Parts		
Model #	Lens Colour	Volts DC	Max Amps	Mounting	Flash	Height	Lens	Circuit	Strobe Tube
27006	Amber	12-48	2.5	PM	DSQ	4 1/2"	877334	27100	129-S
27007	Blue	12-48	2.5	PM	DSQ	4 1/2"	877335	27100	129-S
27026	Amber	12-48	2.5	MM	Single	4 7/8"	877334	27100	129-S
27027	Blue	12-48	2.5	MM	Single	4 7/8"	877335	27100	129-S
27081	Amber	12-48	2.5	MM	Quad	4 7/8"	877334	27100	129-S
27082	Blue	12-48	2.5	MM	Quad	4 7/8"	877335	27100	129-S
27086	Amber	12-48	2.5	FL	DSQ	4 5/8"	877334	27100	129-S
27087	Blue	12-48	2.5	FL	DSQ	4 5/8"	877335	27100	129-S
27066	Amber	12-48	2.5	MB	DSQ	4 1/2"	877334	27100	129-S
27067	Blue	12-48	2.5	MB	DSQ	4 1/2"	877335	27100	129-S
27016	Amber	72-125	0.5	PM	DSQ	4 1/2"	877334	27101	129-S
27017	Blue	72-125	0.5	PM	DSQ	4 1/2"	877335	27101	129-S
27018	Clear	72-125	0.5	PM	DSQ	4 1/2"	877337	27101	129-S
Meets SAEJ1318 Approval									
27088	Clear	12-48	2.5	FL	DSQ	4 1/2"	877337	27101	129-S

Legend: PM = Permanent Mount, MM = Magnetic Mount, MB = Mirror Bracket Mount, FL = Flange Mount
DSQ = User selectable flash patterns: double 126 fpm, single (75 fpm) or quad (192 fpm)

