



Switching Available
p. 78




Mounting Solutions Available
p. 82

HIGH PROFILE STROBE BEACONS

HIGH PROFILE STROBE BEACON OPEN BOTTOM DESIGN, PERMANENT MOUNT

- User selectable flash patterns; double (126 fpm), single (75 fpm) or quad (192 fpm)
- 10-22 Joules (depending on flash pattern chosen)
- Polycarbonate dome/lens
- Fully encapsulated circuitry
- Anodized aluminum base
- Shipping weight: 4.5 lbs (200A), 2.7 lbs (200C)
- Lens colours include: amber, blue, clear, green and red

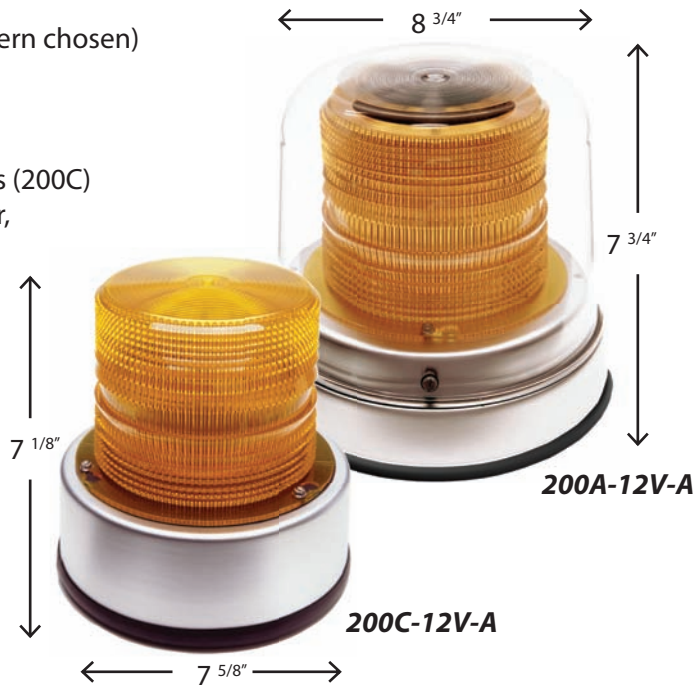

Note: Dimming feature indicates photocell with automatic night time operation

200A Series

Model #	Lens Colour	Volts DC	Max Amps	Dimming	Replacement Parts			
					Dome	Lens	Circuit	Strobe Tube
200A-12V-A	Amber	12-48	2.5	No	134-1-C	300-A	181MF-12V	129
200A-12V-B	Blue	12-48	2.5	No	134-1-C	300-B	181MF-12V	129
200A-12V-C	Clear	12-48	2.5	No	134-1-C	300-C	181MF-12V	129
200APC-12V-A	Amber	12-48	2.5	Yes	134-1-C	300-A	181PC-12V	129
200APC-12V-B	Blue	12-48	2.5	Yes	134-1-C	300-B	181PC-12V	129
200APC-12V-C	Clear	12-48	2.5	Yes	134-1-C	300-C	181PC-12V	129
200A-72V-A	Amber	72-125	0.5	No	134-1-C	300-A	181MF-72V	129
200A-72V-B	Blue	72-125	0.5	No	134-1-C	300-B	181MF-72V	129
200A-72V-C	Clear	72-125	0.5	No	134-1-C	300-C	181MF-72V	129

200C Series

Model #	Lens Colour	Volts DC	Max Amps	Dimming	Replacement Parts			
					Dome	Lens	Circuit	Strobe Tube
200C-12V-A	Amber	12-48	2.5	No	n/a	300-A	181MF-12V	129
200C-12V-B	Blue	12-48	2.5	No	n/a	300-B	181MF-12V	129
200C-12V-C	Clear	12-48	2.5	No	n/a	300-C	181MF-12V	129
200C-72V-A	Amber	72-125	0.5	No	n/a	300-A	181MF-72V	129
200C-72V-B	Blue	72-125	0.5	No	n/a	300-B	181MF-72V	129
200C-72V-C	Clear	72-125	0.5	No	n/a	300-C	181MF-72V	129



Proudly Canadian