



Switching Available  
p.78




Mounting Solutions Available  
p.82

## MEDIUM PROFILE STROBE BEACON SILICONE RUBBER BASE

- Corrosion proof housing
- Polycarbonate lens
- Encapsulated Electronics
- Lens colours include amber, blue, clear and red

### 208 SERIES:

- 12 - 48Vdc
- 2.5 amps

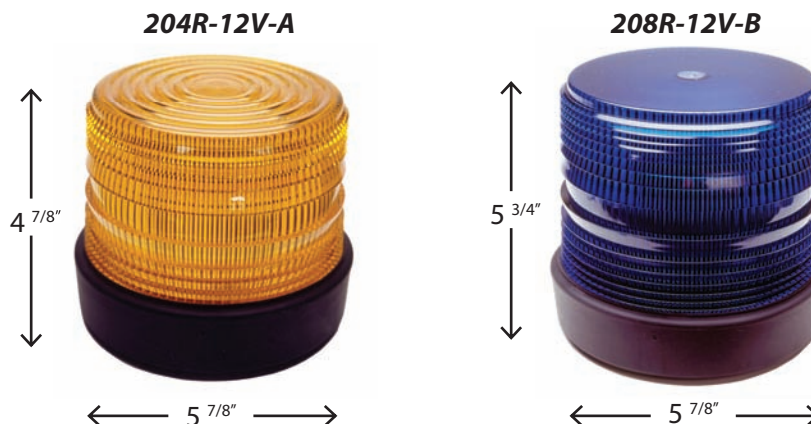

Note: Dimming feature indicates photocell with automatic night time operation

204 Series								Replacement Parts		
Model #	Lens Colour	Volts DC	Max Amps	Flash	Joules	Mounting	Weight lbs	Lens	Circuit	Strobe Tube
204R-12V-A	Amber	12	0.5	Single	3	PM	2.5	298-A	181-ZC-12V	129-Z
204R-12V-B	Blue	12	0.5	Single	3	PM	2.5	298-B	181-ZC-12V	129-Z
204R-24V-A	Amber	24	0.3	Single	3	PM	2.5	298-A	181-ZC-24V	129-Z
204R-24V-B	Blue	24	0.3	Single	3	PM	2.5	298-B	181-ZC-24V	129-Z
204RM-12V-A	Amber	12	0.5	Single	3	MM	2.5	298-A	181-ZC-12V	129-Z
204RM-12V-B	Blue	12	0.5	Single	3	MM	2.5	298-B	181-ZC-12V	129-Z

208 Series							Replacement Parts			
Model #	Lens Colour	Flash	Joules	Mounting	Dimming	Weight lbs	Lens	Circuit	Strobe Tube	
208R-12V-A	Amber	DSQ	*10-22	PM	na	2.45	299-A	181SMF-208R	129-S	
208R-12V-B	Blue	DSQ	*10-22	PM	na	2.45	299-B	181SMF-208R	129-S	
208RPC-12V-A	Amber	DSQ	*10-22	PM	yes	2.45	299-A	194633	129-S	
208RPC-12V-B	Blue	DSQ	*10-22	PM	yes	2.45	299-B	194633	129-S	
208RM-12V-A	Amber	Single	10	MM	na	2.9	299-A	181SMF-208R	129-S	
208RM-12V-B	Blue	Single	10	MM	na	2.9	299-B	181SMF-208R	129-S	
208RDM-12V-A	Amber	Double	18	MM	na	2.9	299-A	181SMF-208R	129-S	
208RDM-12V-B	Blue	Double	18	MM	na	2.9	299-B	181SMF-208R	129-S	
208RQM-12V-A	Amber	Quad	22	MM	na	2.9	299-A	181SMF-208R	129-S	
208RQM-12V-B	Blue	Quad	22	MM	na	2.9	299-B	181SMF-208R	129-S	

**Legend:** DSQ = User selectable flash patterns: double (126 fpm), single (75 fpm) or quad (192 fpm)  
PM = Permanent Mount, MM = Magnetic Mount \*Joule rating depends on flash chosen

MEDIUM PROFILE STROBE BEACONS



Proudly Canadian