



Switching Available
p. 78





Mounting Solutions Available
p. 82

MEDIUM PROFILE STROBE BEACONS

MEDIUM PROFILE STROBE BEACON
DURABLE POLYCARBONATE CONSTRUCTION

- User selectable flash patterns; double (126 fpm), single (75 fpm) or quad (192 fpm)
- 10-22 Joules (depending on flash pattern chosen)
- Fully encapsulated circuitry
- Shipping weight: 2.7 lbs
- 1/2" NPT conduit mount/permanent mount flange mount or bear claw saddle mount versions
- Magnetic mount models supplied with 80 lb pull magnet and switched/fused cigarette lighter plug assembly
- Permanent mount versions supplied with 1/2" NPT feature and surface mount hardware
- Flange conversion kit #27200
- O-ring seal
- Lens colours include amber, blue, clear, green and red

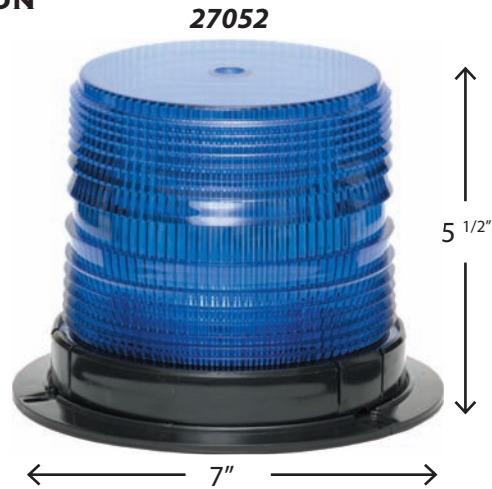

Optional mounting bracket 98017^(D) or 98018^(P) for beacons with a 7" Flange



Optional mounting bracket 98006^(P) or 98007^(D) for beacons with a 5 3/4" base

27021 - Magnet Mount



Note: Dimming feature indicates photocell with automatic night time operation

27000 Series

Model #	Lens Colour	Volts DC	Max Amps	Mounting	Dimming	Flash	Height	Lens	Circuit	Strobe Tube
27001	Amber	12-48	2.5	PM	No	DSQ	5 3/4"	300-S-A	27100	129
27002	Blue	12-48	2.5	PM	No	DSQ	5 3/4"	300-S-B	27100	129
27021	Amber	12-48	2.5	MM	No	Single	5 5/8"	300-S-A	27100	129
27022	Blue	12-48	2.5	MM	No	Single	5 5/8"	300-S-B	27100	129
27041	Amber	12-48	2.5	MM	No	Quad	5 5/8"	300-S-A	27100	129
27042	Blue	12-48	2.5	MM	No	Quad	5 5/8"	300-S-B	27100	129
27051	Amber	12-48	2.5	FL	No	DSQ	5 1/2"	300-S-A	27100	129
27052	Blue	12-48	2.5	FL	No	DSQ	5 1/2"	300-S-B	27100	129
27057	Amber	12-48	2.5	FL	Yes	DSQ	5 1/2"	300-S-A	194633	129
27058	Blue	12-48	2.5	FL	Yes	DSQ	5 1/2"	300-S-B	194633	129
27061	Amber	12-48	2.5	MB	No	DSQ	5 3/4"	300-S-A	27100	129
27062	Blue	12-48	2.5	MB	No	DSQ	5 3/4"	300-S-B	27100	129
27011	Amber	72-125	0.5	PM	No	DSQ	5 3/4"	300-S-A	27101	129
27012	Blue	72-125	0.5	PM	No	DSQ	5 3/4"	300-S-B	27101	129
27013	Clear	72-125	0.5	PM	No	DSQ	5 3/4"	300-S-C	27101	129

Bear Claw Model

Model #	Lens Colour	Volts DC	Max Amps	Mounting	Dimming	Flash	Height
27091	Amber	12-48	0.5	LM	No	Double	6 7/8"

Replacement Parts for Bear Claw Model

Lens	Circuit	Strobe Tube	Saddle
300-S-A	27100	129	27102

**THE BEAR CLAW
LOGGER LIGHT**



Legend: PM = Permanent Mount, MM = Magnetic Mount, MB = Mirror Bracket Mount, FL = Flange Mount
DSQ = User selectable flash patterns: double 126 fpm, single (75 fpm) or quad (192 fpm),
LM = Log Mount, (D) = Driver, (P) = Passenger



Proudly Canadian