



Switching Available p.78




Mounting Solutions Available p.82

LOW PROFILE STROBE BEACONS

LOW PROFILE STROBE BEACON DURABLE POLYCARBONATE CONSTRUCTION

- User selectable flash patterns; double (126 fpm), single (75 fpm) or quad (192 fpm)
- 10-22 Joules (depending on flash pattern chosen)
- Fully encapsulated circuitry
- Shipping weight: 2.7 lbs
- 1/2" NPT conduit mount/permanent mount or flange mount versions
- Magnetic mount models supplied with 80 lb pull magnet and switched/fused cigarette lighter plug assembly
- Permanent mount versions supplied with 1/2" NPT feature and surface mount hardware
- Flange conversion kit #27200
- O-ring seal
- Lens colours include amber, blue, clear, green and red

27006

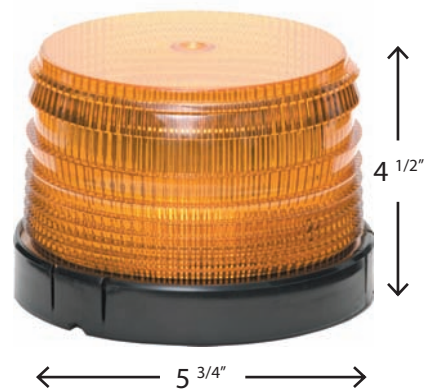

27026 shown on optional bracket 98007 with clamp 98009

27000 Series							Replacement Parts		
Model #	Lens Colour	Volts DC	Max Amps	Mounting	Flash	Height	Lens	Circuit	Strobe Tube
27006	Amber	12-48	2.5	PM	DSQ	4 1/2"	877334	27100	129-S
27007	Blue	12-48	2.5	PM	DSQ	4 1/2"	877335	27100	129-S
27026	Amber	12-48	2.5	MM	Single	4 7/8"	877334	27100	129-S
27027	Blue	12-48	2.5	MM	Single	4 7/8"	877335	27100	129-S
27081	Amber	12-48	2.5	MM	Quad	4 7/8"	877334	27100	129-S
27082	Blue	12-48	2.5	MM	Quad	4 7/8"	877335	27100	129-S
27086	Amber	12-48	2.5	FL	DSQ	4 5/8"	877334	27100	129-S
27087	Blue	12-48	2.5	FL	DSQ	4 5/8"	877335	27100	129-S
27066	Amber	12-48	2.5	MB	DSQ	4 1/2"	877334	27100	129-S
27067	Blue	12-48	2.5	MB	DSQ	4 1/2"	877335	27100	129-S
27016	Amber	72-125	0.5	PM	DSQ	4 1/2"	877334	27101	129-S
27017	Blue	72-125	0.5	PM	DSQ	4 1/2"	877335	27101	129-S
27018	Clear	72-125	0.5	PM	DSQ	4 1/2"	877337	27101	129-S
Meets SAEJ1318 Approval									
27088	Clear	12-48	2.5	FL	DSQ	4 1/2"	877337	27100	129-S

Legend: PM = Permanent Mount, MM = Magnetic Mount, MB = Mirror Bracket Mount, FL = Flange Mount
DSQ = User selectable flash patterns: double 126 fpm, single (75 fpm) or quad (192 fpm)



Proudly Canadian