



Switching
Available
p. 78



Mounting
Solutions
Available
p. 82


360° LED BEACONS

BIOPTIC™ OR MONOPTIC CONFIGURATIONS

- 10 - 30 Vdc
- 0.1 - 0.6 amps @ 12Vdc - Monoptic
- 0.1 - 1.1 amps @ 12Vdc - Bioptic™
- High brightness LEDs
- Multiple user selectable flash patterns
- Fully encapsulated electronics
- 7" flange on select models



22601 on optional mounting bracket 98005

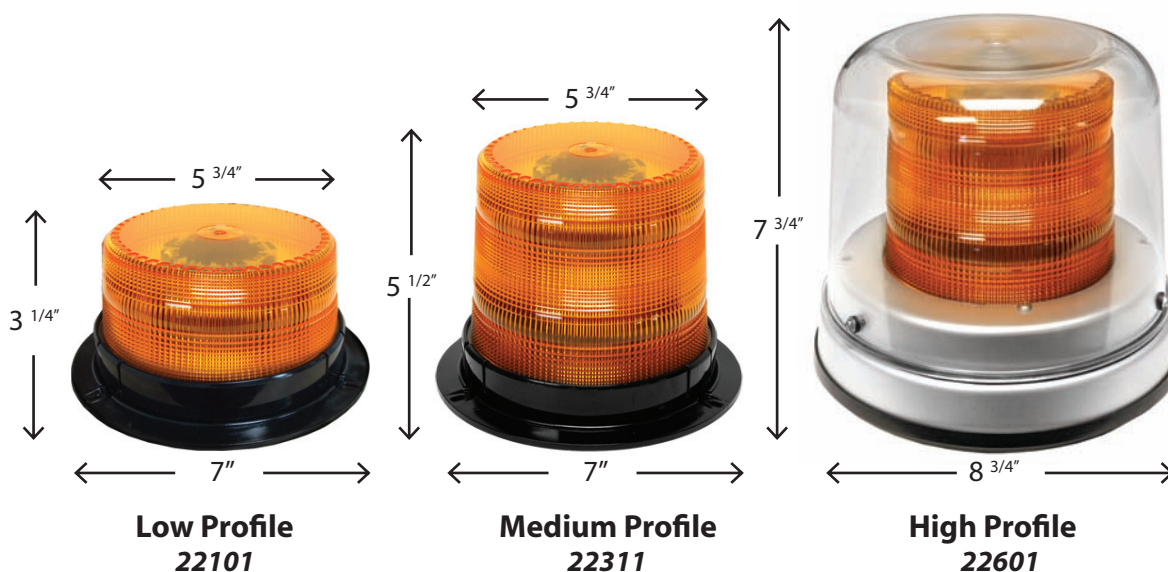

22000 Series

Replacement parts

Part ID	# of LEDs	Amps	Height	Lens Colour	LED Colour	Base Material	Mounting	Lens	Dome
Low Profile									
22101	8	0.1 - 0.6	3 3/8"	Amber	Amber	Polycarbonate	FL	877461	n/a
22102	8	0.1 - 0.6	3 3/4"	Amber	Amber	Polycarbonate	MM	877461	n/a
22105	8	0.1 - 0.6	3 3/8"	Blue	Blue	Polycarbonate	FL	877463	n/a
22106	8	0.1 - 0.6	3 3/4"	Blue	Blue	Polycarbonate	MM	877463	n/a
22109	8	0.1 - 0.6	3 3/8"	Clear	White	Polycarbonate	FL	877459	n/a
Medium Profile									
22311	16	0.1 - 1.1	5 1/2"	Amber	Amber	Polycarbonate	FL	877453	n/a
22312	16	0.1 - 1.1	5 3/4"	Amber	Amber	Polycarbonate	MM	877453	n/a
22315	16	0.1 - 1.1	5 1/2"	Blue	Blue	Polycarbonate	FL	877455	n/a
22316	16	0.1 - 1.1	5 3/4"	Blue	Blue	Polycarbonate	MM	877455	n/a
22319	16	0.1 - 1.1	5 1/2"	Clear	White	Polycarbonate	FL	877451	n/a
High Profile									
22601	16	0.1 - 1.1	7 3/4"	Amber	Amber	Aluminum	PM	877454	134-1-C
22603	16	0.1 - 1.1	7 3/4"	Blue	Blue	Aluminum	PM	877456	134-1-C

Legend: PM = Permanent Mount, MM = Magnetic Mount, FL = Flange Mount



Proudly
Canadian