



Switching
Available
p. 78





Mounting
Solutions
Available
p. 82

HIGH PROFILE ROTATOR BEACONS

HIGH PROFILE ROTATOR BEACONS

- 85 fpm
- Gear driven rotator assembly
- Stainless steel bearings
- 50 watt halogen bulbs
- Polycarbonate outer dome
- Highly polished parabolic reflector

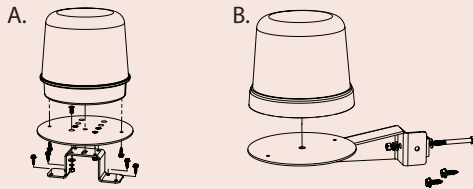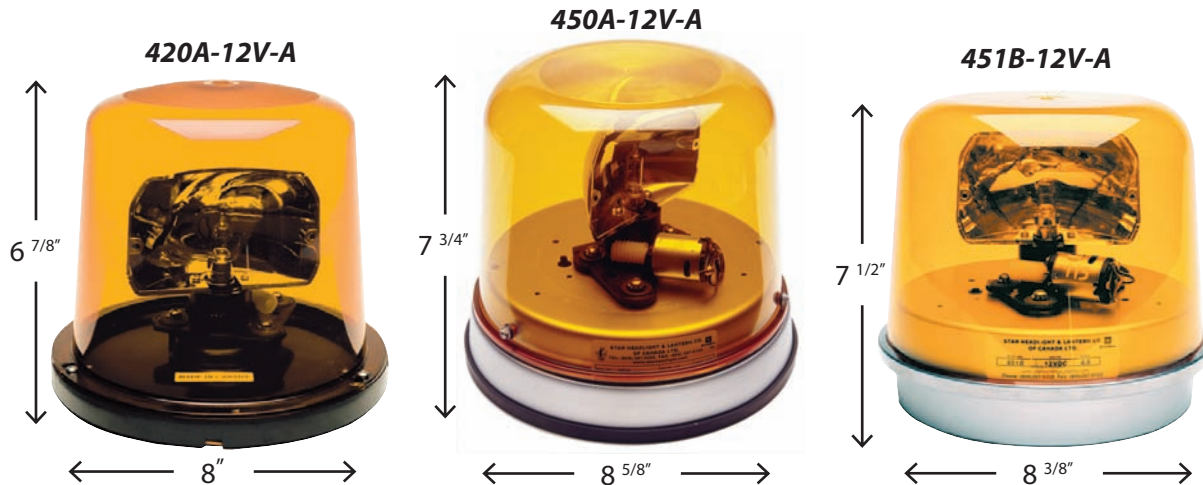

A. 451B-12-V-A shown with optional mounting plate #98011 & C-bracket # 98014

B. Optional mounting Bracket #98004 (Passenger side) mounts a high profile beacon to any 2" upright bar. Order bracket #98005 for driver side

420 & 450 Series							Replacement Parts	
Model #	Dome Colour	Volts DC	Max Amps	Base	Mounting	Base Material	Bulb	Dome
420A-12V-A	Amber	12	4	Closed	FL	ABS	2073-795	134-3-A
420A-12V-B	Blue	12	4	Closed	FL	ABS	2073-795	134-3-B
420A-12V-C	Clear	12	4	Closed	FL	ABS	2073-795	134-3-C
420A-24V-A	Amber	24	2	Closed	FL	ABS	2073-H50W24V	134-3-A
420A-24V-B	Blue	24	2	Closed	FL	ABS	2073-H50W24V	134-3-B
420A-24V-C	Clear	24	2	Closed	FL	ABS	2073-H50W24V	134-3-C
450A-12V-A	Amber	12	4	Open	PM	Aluminum	2073-795	134-1-A
450A-12V-B	Blue	12	4	Open	PM	Aluminum	2073-795	134-1-B
450A-12V-C	Clear	12	4	Open	PM	Aluminum	2073-795	134-1-C
450A-24V-A	Amber	24	2	Open	PM	Aluminum	2073-H50W24V	134-1-A
450A-24V-B	Blue	24	2	Open	PM	Aluminum	2073-H50W24V	134-1-B
450A-24V-C	Clear	24	2	Open	PM	Aluminum	2073-H50W24V	134-1-C
451B-12V-A	Amber	12	4	Closed	PM	Aluminum	2073-795	134-2-A
451B-12V-B	Blue	12	4	Closed	PM	Aluminum	2073-795	134-2-B
451B-12V-C	Clear	12	4	Closed	PM	Aluminum	2073-795	134-2-C
451B-24V-A	Amber	24	2	Closed	PM	Aluminum	2073-H50W24V	134-2-A
451B-24V-B	Blue	24	2	Closed	PM	Aluminum	2073-H50W24V	134-2-B
451B-24V-C	Clear	24	2	Closed	PM	Aluminum	2073-H50W24V	134-2-C

Legend: FL = Flange Mount, PM = Permanent Mount



Proudly
Canadian